


## L-SERIES – Variable Frequency Drive AIR-COOLED\* TWO-STAGE

### Dimensions and Specifications *Typical, do not use for construction. (Drawings are provided with order acknowledgement.)*

Model	Motor HP	Max. Pressure PSIG	Free Air Delivery CFM	Length In.	Width In.	Height In.	Net Weight Lbs.
KNWA00-A/XL	25	100	65-75	85	36	68	2260
KNWA00-B/XL	30	100	65-95	85	36	68	2390
KNWA00-C/XL	40	115	110-127	85	36	68	2480
KNWA00-D/XL	50	115	110-167	85	36	68	2610
KNWA00-E/XL	60	115	110-209	85	36	68	2700
KNWA0-A/XL	50	110	80-172	93	49	66	3970
KNWA0-B/XL	60	110	80-223	93	49	66	4065
KNWA0-C/XL	75	110	80-292	93	49	66	4205
KNWA0-D/XL	100	135	80-331	93	49	66	4235
KNWA1-A/XL	100	125	280-413	136	63	74	6045
KNWA1-B/XL	125	125	280-504	136	63	74	6395
KNWA1-C/XL	125	120	280-534	136	63	74	6395
KNWA1-D/XL	150	125	280-618	136	63	74	6820
KNWA1-E/XL	150	115	280-653	136	63	74	6820
KNWA1-F/XL	200	135	280-728	136	63	74	6820
KNWA1-G/XL	200	125	280-818	136	63	74	6970
KNWA2-A/XL	200	110	535-915	160	75	110	10525
KNWA2-B/XL	250	125	535-1102	160	75	110	10725
KNWA2-C/XL	300	125	535-1316	160	75	110	11575
KNWA2-D/XL	350	115	535-1559	160	75	110	12175

\* For water-cooled requirements refer to bulletin KNW/XL

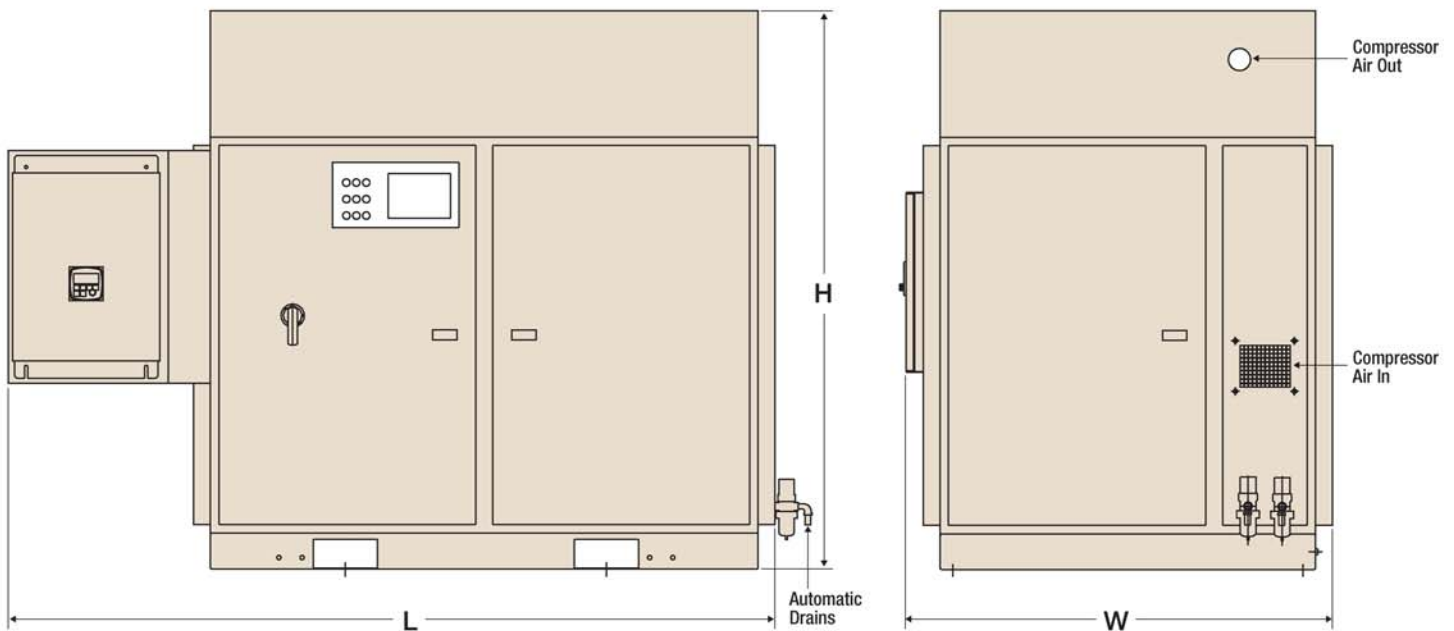

## Standard Equipment and Safety Devices

### Controls and Instrumentation

#### Service Indicators

- Air inlet filter condition
- Oil filter condition
- Oil level gauge
- Routine maintenance

#### Pressure Indicators

- First stage air discharge
- Second stage air discharge
- Oil lubrication
- First Stage Inlet

#### Temperature Indicators

- First stage air discharge
- Second stage air inlet
- Second stage air discharge
- Oil lubrication
- Compressor discharge temperature
- First Stage Inlet

#### Additional Indicators

- Stand-by mode light
- Run Light
- Oil pump
- Fan run
- Compressor run
- Compressor load light
- Alert light
- Alarm light
- Hour meter – running time
- Hour meter – loaded time
- Manual unload display
- Lead/Lag (Optional)
- Local/Remote (Optional)
- Auto restart after PF

### Safety Devices

All safety shutdowns, indicated by message on display and alarm light

- Compressor motor overload shutdown
- Oil pump motor overload shutdown
- Fan motor overload shutdown
- High first stage air discharge temperature shutdown
- High second stage suction temperature shutdown
- High second stage air discharge temperature shutdown
- High oil temperature shutdown
- Low oil pressure shutdown
- High cabinet temperature shutdown
- Starter failure

- Temperature pre-shutdown alert
- Compressor discharge temperature shutdown

#### Additional Devices

- E-Stop
- Start/stop push buttons
- Lamp test
- Audible alarm
- Acknowledge
- Reset push button
- Common alarm contacts for remote indication
- Event alarm log
- Trend charts
- Internet options
- Data logging
- Color monitor

## Additional Features

### Packaged Assembly

- Air-cooled or water cooled
- Integral air-cooled or water-cooled aftercooler with moisture separator and automatic drain
- Cabinet ventilating fan
- Easy access for maintenance
- Removable doors
- Low installation cost
- Few connections required for installation – compressed air, condensate drains, electrical and water (when required)
- CSA certified panel



### Advanced Design

- Super Rotor delivers more cfm per horsepower
- Patent numbers 4583927 & 4671749

### Efficient Control

- Load/unload electro-pneumatic
- DC link reactor
- Variable frequency drive

### Vibration Free

- No vibration generated in rotary design
- No special foundation required

Standard and optional equipment subject to change without notice.

**DISTRIBUTED BY:**

**FRIMONT**  
Sistemas Frigoríficos

FRIMONT S. A.  
Acceso Sur 4565 - (5507) Luján de Cuyo – Mendoza – Argentina  
Tel: +54 (261) 524 8350  
Fax: +54 (261) 524 8350 Int. 101  
Email: info@frimont.com  
www.frimont.com